




DURO - FLEX®

P-1

-30°C/ +70°C

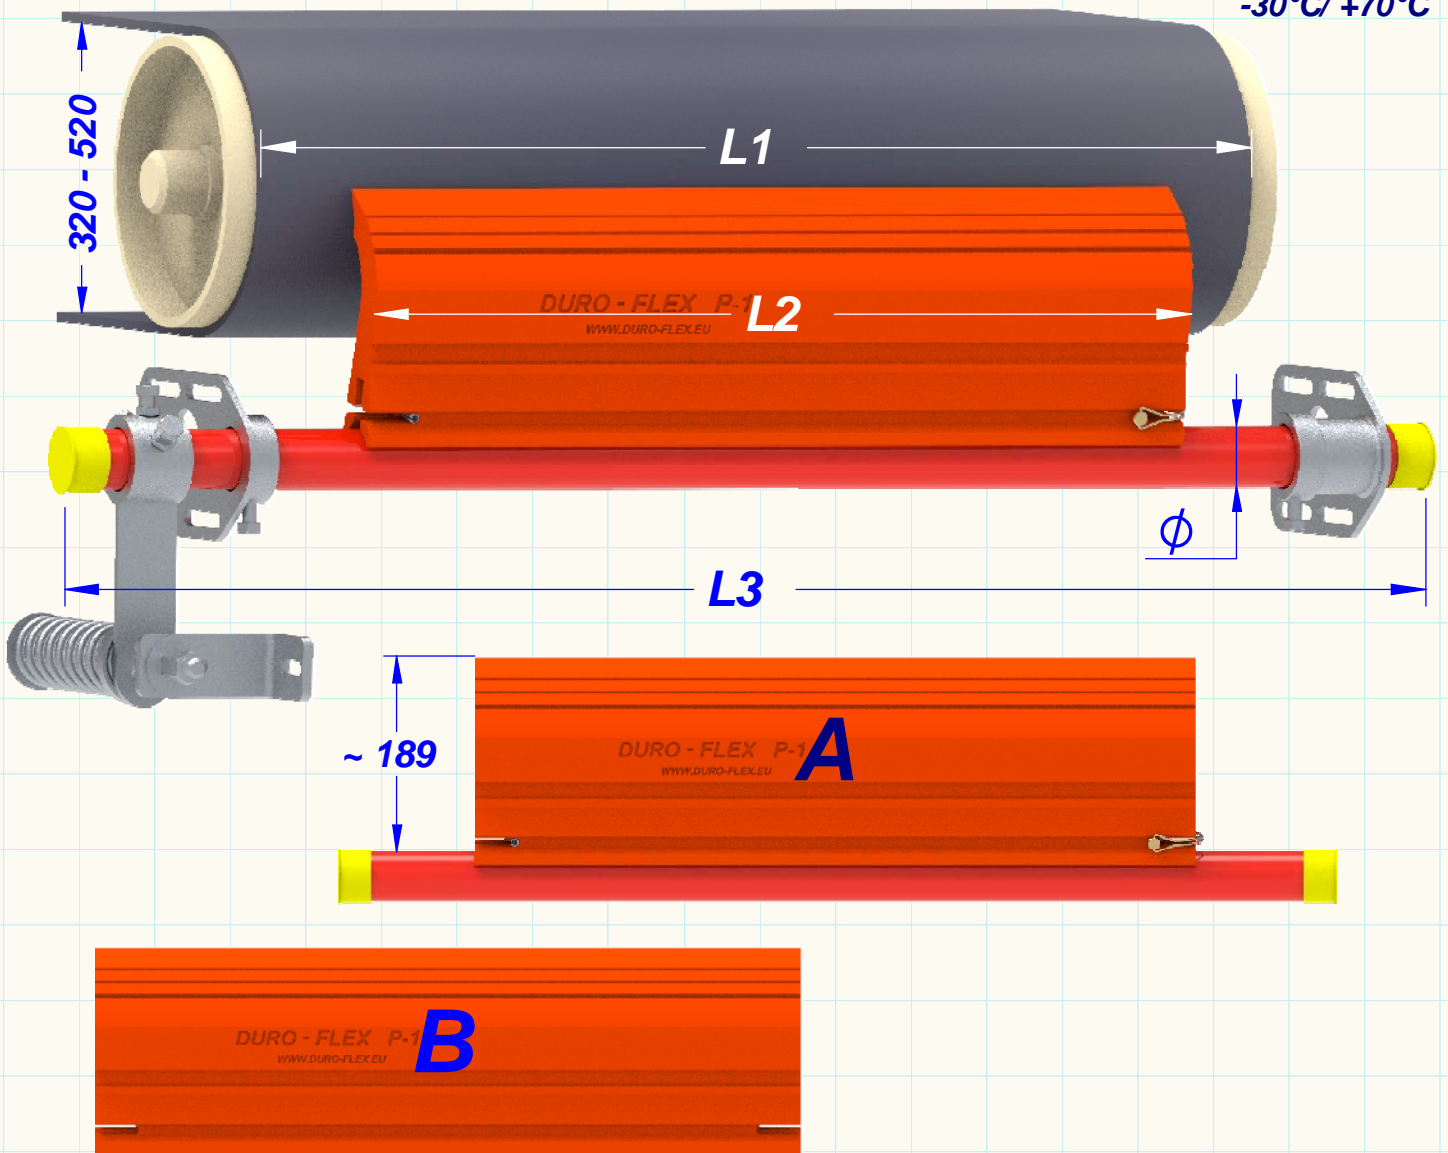

L1	L2	L3	Ø	A	€	B	€
400	350	1000	48	12510-350		12520-350	
500	400	1000		12510-400		12520-400	
650	450	1200		12510-450		12520-450	
650	500	1200		12510-500		12520-500	
800	600	1300		12510-600		12520-600	
800	650	1300		12510-650		12520-650	
1000	700	1500		12510-700		12520-700	
1000	800	1500		12510-800		12520-800	
1200	900	1700		12510-900		12520-900	
1200	1000	1700		12510-1000		12520-1000	
1400	1100	1900	60	12510-1100		12520-1100	
1400	1200	1900	60	12510-1200		12520-1200	
1500	1300	2100	60	12510-1300		12520-1300	



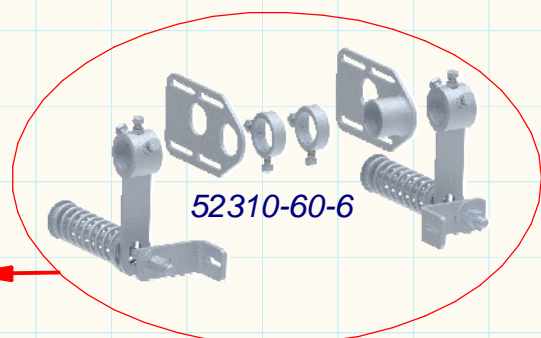
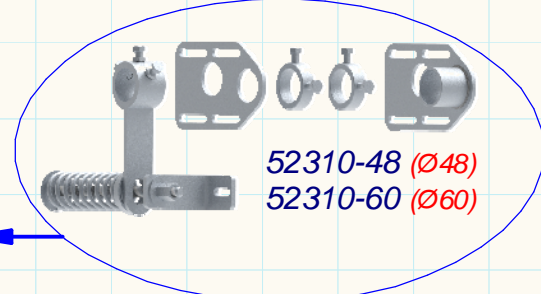


dimension in mm

www.duro-flex.eu

DURO - FLEX®

P-1

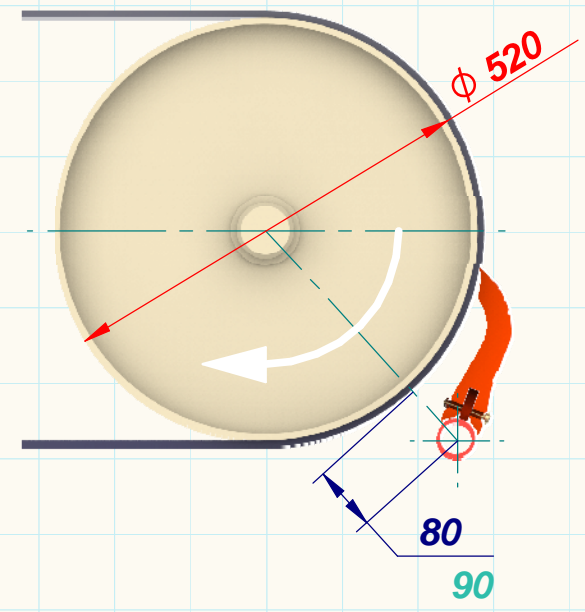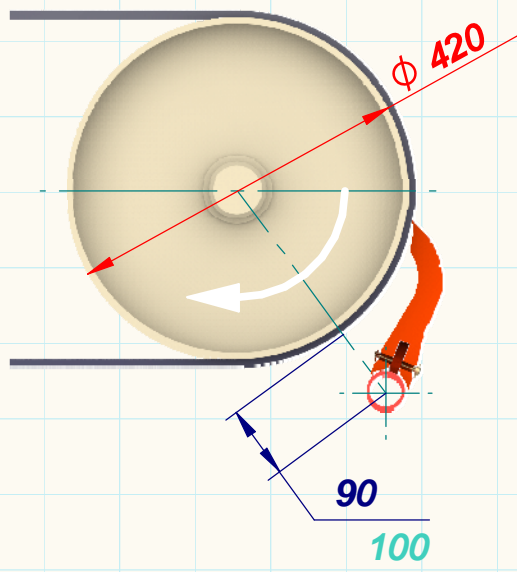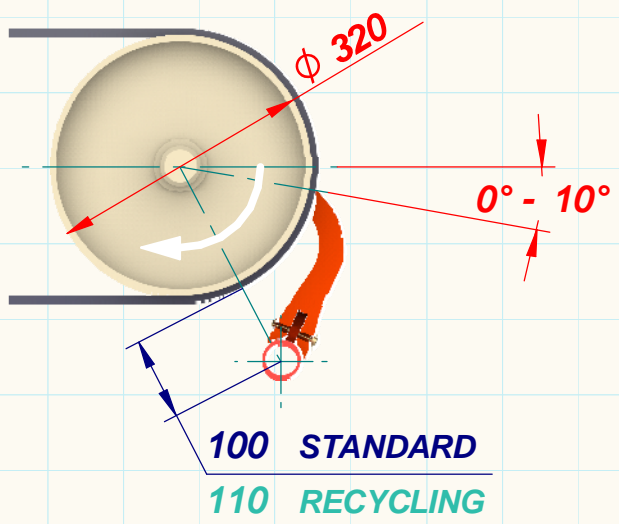

ENDE / WEAR LINE /
LIMIT D'USURE / FINE



dimension in mm

www.duro-flex.eu