

DURO - FLEX®


CHEVRON

max. 32

-30°C/ +70°C




L1

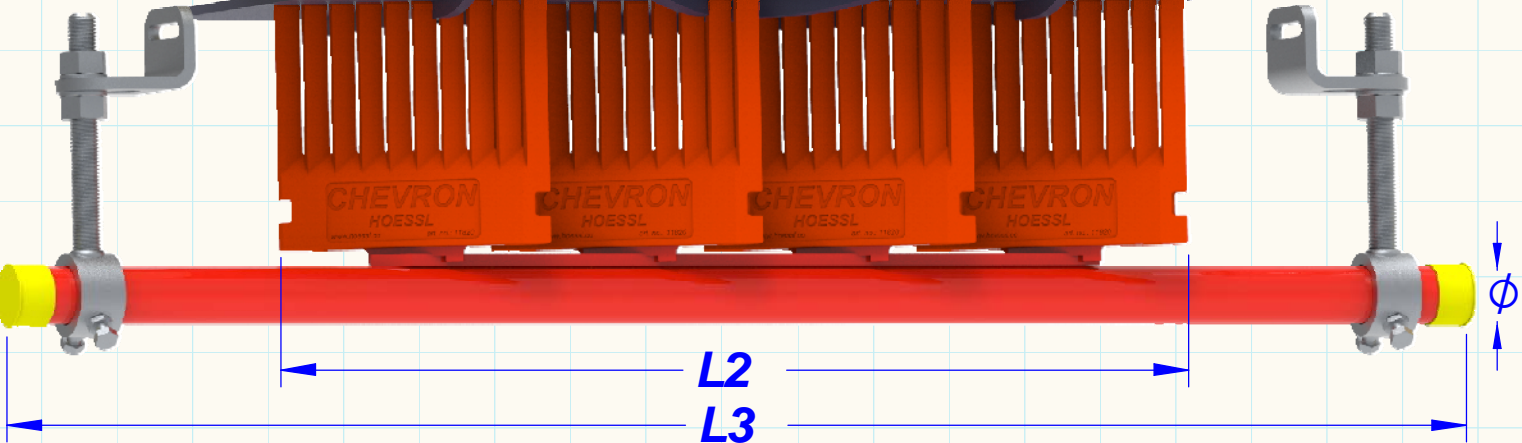

L2

L3

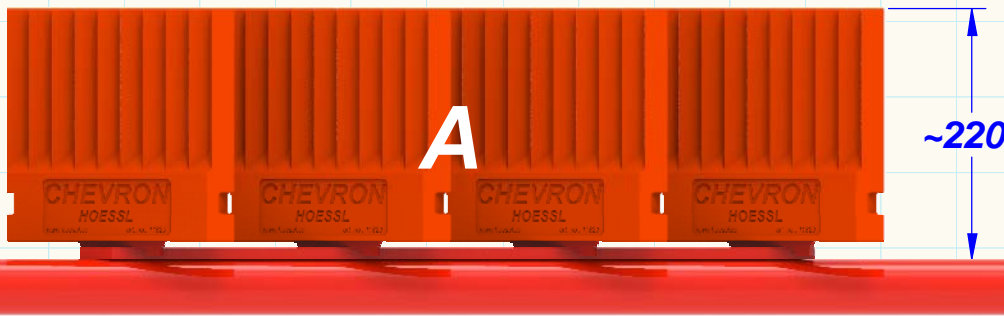


A


~220



53315



POLYURETHAN

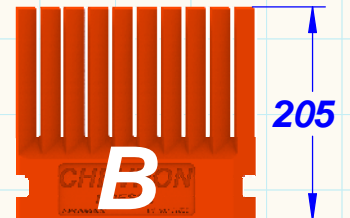

205

11820

NYLON



140

11820 / N

L1	L2	L3	Ø	A	€	B
400/500	390	1000	48	11810 - 390		2
650	580	1200		11810 - 580		3
800	770	1300		11810 - 770		4
1000	960	1500		11810 - 960		5
1200	1150	1700		11810 - 1150		6
1400	1340	1900		11810 - 1340		7
1600	1530	2100		11810 - 1530		8
1800	1720	2300	60	11810 - 1720		9
2000	1910	2500		11810 - 1910		10



M24 x 200
(53310 - 200)

M30 x 200
(53311-200)

dimension in mm

www.duro-flex.eu

DURO - FLEX®

CHEVRON

